



तिनाउ गाउँपालिका

Tinau Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office Of The Rural Municipal Executive

दोभान, पाल्पा

Dobhan, Palpa

स्था : २०७३/Estd. 2017 A.D.

लुम्बिनी प्रदेश, नेपाल

Lumbini Province, Nepal

पत्र संख्या /Letter No.:

चलानी नं. /Ref. No.:

दररेट पेश गर्ने सम्बन्धी सूचना

प्रथम पटक प्रकाशित मिति २०८२।१२।११


१. तिनाउ गाउँपालिकाद्वारा विभिन्न निर्माण व्यवसायी संग तपिशल वमोजिमको कार्य गर्न दररेट पेश गर्नका लागि यो सूचना प्रकाशित गरिएको छ ।

तपिशल

क्र. स.	कार्य विवरण	जम्मा रकम (मुल्य अभिवृद्धि कर ,भ्याट सहित) कन्टेन्जेन्सी वाहेक	दररेट पेश गर्ने अन्तिम मिति	कै.
१	खानेपानी मर्मत सम्भार तथा निर्माण गर्ने कार्य तिनाउ-०२ (महापुर ,खुल्खुले ,तोरीवारी,खेत खोला ,हात्तिसार)	९,७९,८०७.१७	२०८२।१२।१७	

२. दररेट पेश गर्ने निर्माण व्यवसायीले अनिवार्य रूपमा दररेट पेश गर्ने व्यहोरा सम्बन्धमा लिखित निवेदन सहित नविकरण भएको फर्म/ कम्पनी दर्ता प्रमाणपत्रको प्रतिलिपी,नविकरण भएको व्यवसाय दर्ता (निर्माण व्यवसायी इजाजत प्रमाण पत्र) प्रमाणपत्रको प्रतिलिपी,मु.अ.क.दर्ता प्रमाणपत्रको प्रतिलिपी र आर्थिक वर्ष २०८१/८२ को करचुक्ता प्रमाणपत्रको प्रतिलिपी संलग्न गरि पेश गर्नुपर्नेछ ।

३. BOQ ,Specification यस कार्यालयको Website वाट समेत डाउनलोड गर्न सकिनेछ ।

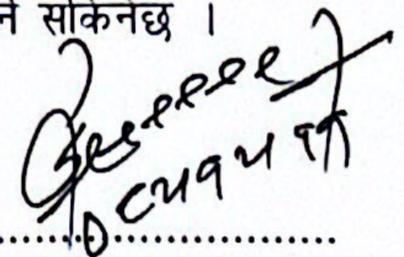

दिनेश सारु

प्रमुख प्रशासकीय अधिकृत



तिनाउ गाउँपालिका
गाउँकार्यपालिकाको कार्यालय

दोभान पाल्पा लुम्बिनी प्रदेश नेपाल
कार्यालय कोड नं.: ८०१०५५५०३

निर्माण कार्यको परिमाण अनुमान फारम

[Signature]
प्रमुख प्रशासकीय अधिकृत
मले.प.फारम नं: ५०१ क

कार्यक्रम / योजनाको नाम:-सानेपानी मर्मत सभार महापुर,खुलखुले, तोरीबारी,खेतखोला,हातिसार
कार्यक्रम / योजनाको नाम र कार्यान्वयन हुने स्थल: तिनाउ-२,पाल्पा
सम्पन्न हुने अनुमानित अवधि:.

आर्थिक वर्ष: २०८२-८३

बजेट उप शीर्षक नं:

Sno	Item Description	Unit	Quantity	Bidder's Rate (NPR).	Bidder's Rate (in words)	Total Amount (NPR)	Remarks
A Provisional Sum							
1	Supply and fixing of contract information board(hoarding board)3*4' size as per direction and Requirement on the Site	PS	1.00	5000.00	5000.00		
				TOTAL OF PS ITEMS		5000.00	
B Civil Works							
1	Site clearance including cutting the shrub, grass, bushes, tree if required etc. & uprooting, dressing, levelling & disposing the materials 30 m from the site as specified complete work as per specification and instruction of site engineer	Sqm	73.00				
2	Earth work in excavation in hard ,boulder mixed soil for foundation trench including Timbering and pumping out water from the trenches(if necessary), Ramming of bottom,lift up to 2m lead 10m, stacking of excavated materials , clear from the edge of foundation trench with all complete as per specification & instruction of site engineer	Cum	55.10				
3	Earth backfilling in excavated trenches in 150 mm thick layer, watering, ramming all complete.	Cum	16.96				

प्रमुख प्रशासकीय अधिकारी



4	STONE/BOULDER SOLING: Providing and laying boulder/stone soling in foundation of water tank. floor, with approved quality stone/boulder in required line and leveling all complete as per drawings, specifications and instructions of the Site Incharge.	Cum	3.89			
5	STONE MASONRY WORKS: Providing and laying Rubble Stone Masonry works in cement mortar 1:6 (1 cement : 6 coarse sand) including the cost of scaffolding, breaking stones, raking joints, curing, all complete as per drawing, specifications and instructions of the Site Incharge.	Cum	3.70			
6	STONE MASONRY WORKS: Providing and laying Rubble Stone Masonry works in cement mortar 1:4 (1 cement : 4 coarse sand) including the cost of scaffolding, breaking stones, raking joints, curing, all complete as per drawing, specifications and instructions of the Site Incharge.	Cum	2.25			
7	Manually mixed Plain cement Concrete (PCC) for RCC works (1:2:4) M15 for Super structural work with approved quality of cement and sand and crushed stone aggregate including mixing, laying, curing etc all complete in approval of site engineer.	Cum	2.82			
8	Manually mixed Plain cement Concrete (PCC) for RCC works (1:1.5:3) M20 for structural work with approved quality of cement and sand and crushed stone aggregate including mixing, laying, curing etc all complete in approval of site engineer.	Cum	1.84			
9	Formwork, shuttering, centering for Vertical Wall with 19 mm thick waterproof ply board and steel post for all works necessary propping, scaffolding, staging, supporting inclusive of wedging and cutting holes for utilization all complete.	Sqm.	2.32			
10	HDPE formwork for ferrocement all works necessary propping, scaffolding, staging, supporting inclusive of wedging and cutting holes for utilization all complete.	Sqm.	39.47			
11	STELL REINFORCEMENT: Providing and fixing in position Fe 500 steel reinforcement of various diameter conforming to relevant IS code in R.C.C. works including straightening, cutting, bending, binding with 20 SWG annealed wire for tying the reinforcement bars at each junctions (binding wire shall not be measured separately) including all waste and cut pieces. provision for adequate numbers of spacers, chairs, providing and placing all complete as per drawings, specifications and instructions of the Engineer. (Authorized lap length and for the bar length exceeding 10 meter in length shall be measured for the payment).	Kg.	158.50			
12	Bar binding works including chicken wire, steel bars, GI plain wires, etc.	Sqm	39.47			

प्रमुख प्रशासकीय अधिकृत



13	CEMENT SAND PLASTER 12.5 MM THICK: Providing and laying, 12.5mm thick plaster in 1:4 mix on water tank .wall etc. of good finish. including raking the joints, cleaning and wetting the surface and curing the works all complete, as per drawing, specification and instruction of engineer, all complete.	Sqm	36.83			
14	CEMENT SAND PLASTER 12.5 MM THICK: Providing and laying, 12.5mm thick plaster in 1:3 mix on water tank ,wall etc. of good finish, including raking the joints, cleaning and wetting the surface and curing the works all complete, as per drawing, specification and instruction of engineer, all complete.	Sqm	11.98			
15	CEMENT SAND PLASTER 12.5 MM THICK: Providing and laying, 12.5mm thick plaster in 1:2 mix on water tank .wall etc. of good finish, including raking the joints, cleaning and wetting the surface and curing the works all complete, as per drawing, specification and instruction of engineer, all complete.	Sqm	157.85			
16	Bitumen paint on the buried surface of storage tank	Sqm	19.52			
17	Snowcem paint on exposed surface of storage tank approved colour over one coat of primer painting over properly cleaned surface all complete	Sqm	21.31			
18	3 mm thick cement sand (1:1) punning on floor, water tank etc, including mixing laying and rubbing with steel trowel to a hard, smooth and shining surface and curing all complete.	Sqm	54.24			
19	Standard Manhole cover set 60×60 cm size	Set	4.00			
20	Installation, Supply of pipe and pipe fitting Items for Each Household Tap Connection. main including all fittings and accessories all complete	Job	40.00			
21	Laying and joining of 32 mmØ HDPE pipe with butt-weld joints	R.M	2000.00			
22	Laying and joining of 20,25 mmØ HDPE pipe with butt-weld joints	R.M	3600.00			
23	GI PIPE JOINING WORK WITH WELDED JOINTS 25 MM DIA GI (FOR IM	R.M	12.00			
		Sub Total Of B CIVIL Works				


Prepared By:

Checked By:

Approved By:

C Procurement Items.						
1	HDEP Pipe (PE-100) PN16 - 1 inch, (32mm)	R.m	2000.00			
2	GI Pipe 25 mm medium class	R.m	12.00			
3	HDEP Pipe (PE-100) PN16 - 1 inch, (25mm)	R.m	1500.00			
4	HDEP Pipe (PE-100) PN16 - 1 inch, (20mm)	R.m	2100.00			
5	RVT 10CUM & 5 CUM Same size Inlet FAITTING					
	GI Union 25 mmO	nos	2.00			
	GI Pipe medium Class (1m long) 25 mmO	rm	2.00			
	GI Elbow (2 nos.) 25 mmO	nos	2.00			
	GI Pipe medium Class (60 cm long) 25 mmO	rm	1.20			
	GI Socket 25 mmO	nos	2.00			
	GI Pipe medium Class (1.2 m long) 25 mmO	rm	2.40			
	GI Elbow 25 mmO	nos	2.00			
5.1	RVT 10CUM & 5 CUM Same size OUTLET-1 FITTINGS					
	GI Nipple (30cm long) 25 mmO	nos	4.00			
	GI Elbow (2 nos.) 25 mmO	nos	4.00			
	GI Pipe medium Class(1m long) 25 mmO	rm	2.00			
	GI Nipple (7.5cm long) 25 mmO	nos	6.00			
	GI Union 25 mmO	nos	2.00			
	GM Gate Valve 25 mmO	nos	2.00			
	GI Unequal Tee 25*25*15 mmO	nos	2.00			
	GI Union 25 ramO	nos	2.00			
	GI Nipple (7.5cm long)1 5 mmO	nos	2.00			

प्रमुख प्रशासकीय अधिकृत



	GI Elbow (2 nos.) 15 mmØ	nos	4.00			
	GI Nipple (15 cm) 15 mmØ	nos	2.00			
	GI Union 15 mmØ	nos	2.00			
	GI Pipe medium Class(1.2m long) 15 mmØ	rm	2.40			
	GI Pipe medium Class (60 cm) 15 mmØ	rm	1.20			
	GI Socket 15 mmØ	nos	2.00			
	GI Pipe medium Class(1m long) 15 mmØ	rm	2.00			
	GI Equal Tee 15 mmØ	nos	2.00			
5.2	RVT 10CUM & 5 CUM Same size WASHOUT AND OVERFLOW *					
	GI Nipple (30 cm long) 50 mmØ	nos	2.00			
	GI Elbow 50 mmØ	nos	6.00			
	GI Pipe medium Class (1m long) 50 mmØ	rm	2.00			
	GI Union 50 mmØ	nos	4.00			
	GI Nipple (7.5 cm long) 50 mmØ	nos	6.00			
	GI Nipple (15cm long) 50 mmØ	nos	4.00			
	GM Gate Valve 50 mmØ	nos	2.00			
	GI Equal Tee 50 mmØ	nos	2.00			
	GI Union 50 mmØ	nos	2.00			
	GI Pipe medium Class (1m long) 50 mmØ	rm	2.00			
	GI Pipe medium Class (0.6m long) 50 mmØ	rm	1.20			
	GI Socket 50 mmØ	nos	2.00			
	GI Pipe mediums Class (1.2m long) 50 mmØ	rm	2.40			

प्रमुख प्रशासक अधिकारी
 तिनाउ गाउँपालिका
 गाउँ कार्यपालिकाको कार्यालय
 दोभान, दाङ, नेपाल
 तम्घिनी-१, कैलाल

6	Catchment With Intake FITTING 4 Nos same size					
	G.I pipe 25 mm (0.7m long)	Rm	2.80			
	GM Gate Valve 25 mm	Nos	4.00			
	G.I Nipple 25 mm (5cm long)	Nos	8.00			
	G.I Union 25mm	Nos	8.00			
	G.I pipe 50 mm (0.60 m long)	Rm	7.20			
	End Cap	Nos	8.00			
Total Cost for all Item						
VAT @ 13 %						
Grand Total						

The total price of our Bid, excluding any discounts offered is :

Name of Bidder/Suppliers

Address

Bidder's /Suppliers Legal Name

Bidder's /Suppliers Address:

Bidder/Suppliers Country of Registration:

Bidder/Suppliers Year of Registration:

Bidder/Suppliers Authorized Representative Information:

Name:

Address:

Telephone/Fax numbers:

Email Address

Prepared By:

Checked By:

Approved By: